



APPLICATION

The PG is primarily a return & exhaust air grille which can be used in commercial or industrial applications which require low resistance, high to medium air volume. The perforated face provides a clean design and uncluttered appearance preferred by architects. The PG grille can be mounted in a panel for a standard T-bar ceiling.

FEATURED STANDARD CONSTRUCTION

•FRAME:

- Constructed from heavy extruded aluminum material with interlocked corners and mechanically stacked to form a rigid frame.

•FACE:

- Face pattern perforated 22 gauge thickness with 4 mm hole diameter and 40% open free area.

•FINISH:



- RAL 9010.

•SIZES:

- Minimum size : 6" x 4"
- Maximum size : 48" x 24"
- Larger sizes are constructed of factory joined multiple sections.

OPTIONS

- Opposed blade damper (OBD) can be fixed on the back of the grille.
- Concealed clips for fixation or countersunk screwholes in the border for fixation.
- Rubber gasket on the back of the frame.
- 1" (25mm) Aluminum Filter.
- Mill finish (brut), all type of RAL finishing.

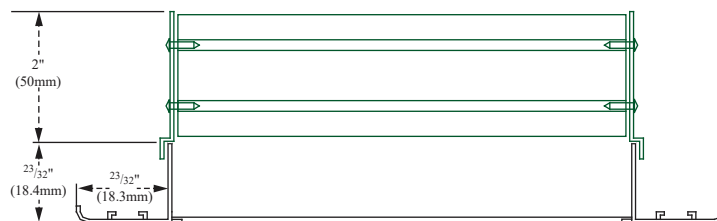

NB : 5 mm Clearance is deducted from your order size.