



BY-PASS VAV BOX MODEL KVAD-200-BP

PRESSURE DEPENDENT

STANDARD CONSTRUCTION

FRAME:

22 GA galvanized steel interlocking sections.

BLADES:

16 GA galvanized 2V type blades.

BEARINGS:

Bronze bearings.

AXLES:

12mm square zinc plated steel stud.

FINISH:

Mill galvanized.

INSULATION:

15mm clean liner fiber glass.

GASKETS:

Rubber foam gaskets on blade and on airflow side.

CONTROL ENCLOSURE:


NEMA1 control enclosure.

BYPASS PLENUM:

Sizes 14", 16" & 18" provided with a bypass plenum as standard design, with opening towards the inlet. Model: BY-PB

OPTIONS:

- 1) 20 GA galvanized casing.
- 2) Stainless steel construction grade 304 or 316.
- 3) Aluminum foil facing insulation 15mm or 25mm.
- 4) 1" (25mm) clean liner fiber glass insulation.
- 5) Polymer closed cell foam.
- 6) Double wall construction fiber glass covered with perforated sheet.
- 7) Metal noising at outlet to cover insulation edges.
- 8) Balancing damper on bypass side.
- 9) Flanged discharge (Duct flange or Duct mate).
- 10) Slip & drive connection.
- 11) Stand alone control with room thermostat.
- 12) BACNET control with room thermostat.
- 13) Lon control with room thermostat.
- 14) Sizes 6", 8", 10" & 12" can be provided with a bypass plenum. Model: BY-PB.

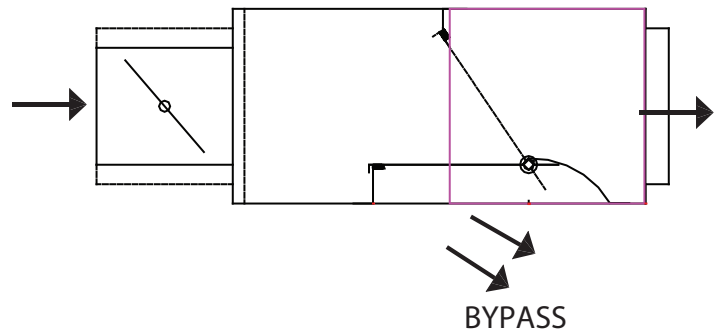

MINIMUM SIZES:

6" Round inlet.

MAXIMUM SIZES:

18" Rectangular inlet.




Product tested in Intertek Lab in accordance with ARI Standard 880.

MODEL KVAD-200-BP

DIMENSIONAL DATA




STANDARD

| UNIT SIZE | D | W | H | L | W1 | H1 | L1 | B | C |
|-----------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 6 | 150 | 250 | 250 | 550 | 200 | 200 | 735 | 200 | 200 |
| 8 | 200 | 250 | 250 | 550 | 200 | 200 | 735 | 200 | 200 |
| 10 | 250 | 300 | 300 | 550 | 250 | 250 | 735 | 250 | 250 |
| 12 | 300 | 350 | 350 | 750 | 300 | 300 | 935 | 300 | 300 |

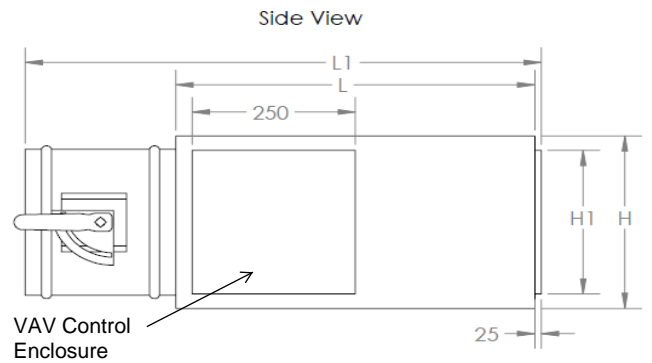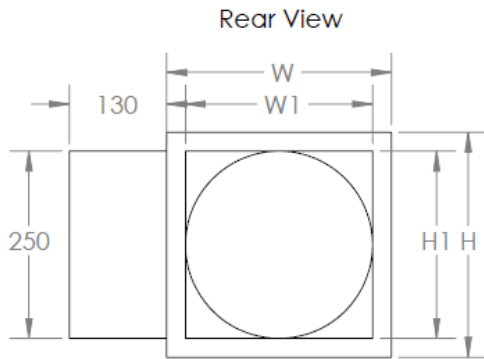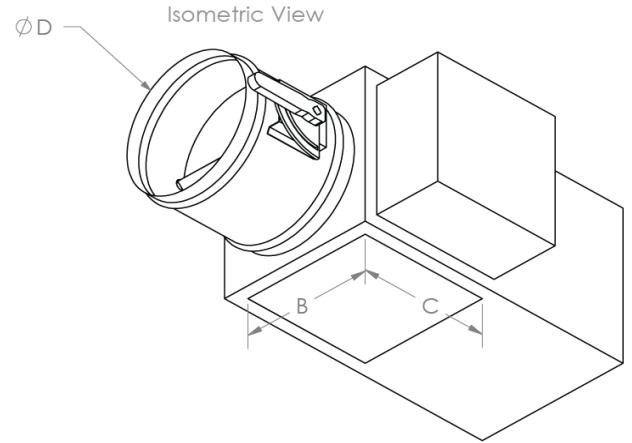

WITH BYPASS PLENUM (BY-PB)

| UNIT SIZE | D | W | H | L | W1 | H1 | L1 | H* | E |
|-----------|---------|-----|-----|-----|-----|-----|-----|-----|-----|
| 6 | 150 | 250 | 250 | 550 | 200 | 200 | 735 | 330 | 400 |
| 8 | 200 | 250 | 250 | 550 | 200 | 200 | 735 | 330 | 400 |
| 10 | 250 | 300 | 300 | 550 | 250 | 250 | 735 | 380 | 400 |
| 12 | 300 | 350 | 350 | 750 | 300 | 300 | 935 | 430 | 600 |
| 14 | 350 | 400 | 400 | 750 | 350 | 350 | 935 | 500 | 600 |
| 16 | 450x350 | 500 | 400 | 800 | 450 | 350 | 940 | 500 | 650 |
| 18 | 550x350 | 600 | 400 | 800 | 550 | 350 | 940 | 500 | 650 |

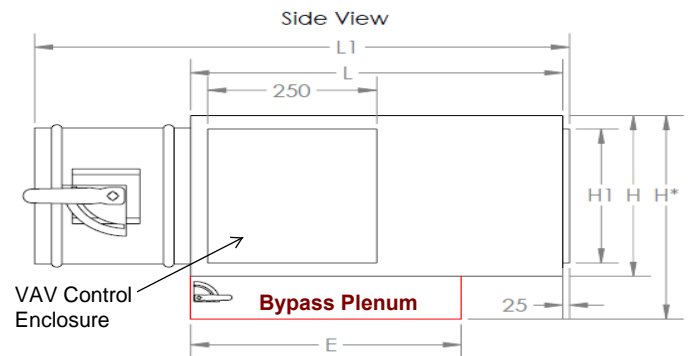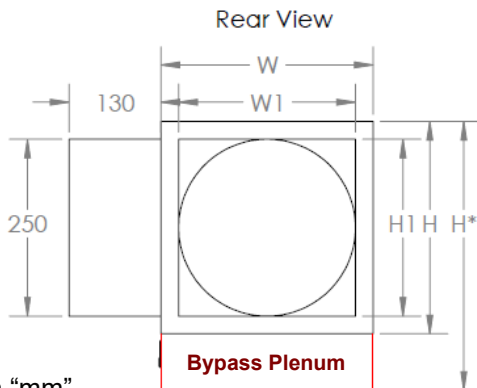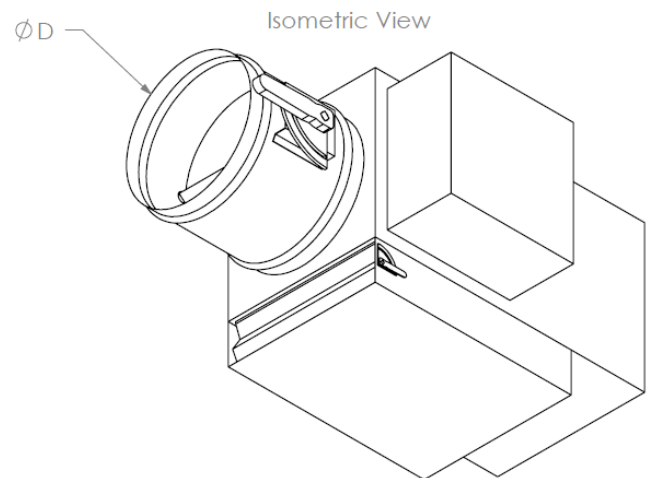

NOTES:

- 1) All sizes are in "mm"
- 2) Sizes 14, 16 & 18 are supplied with Bypass Plenum as standard *
- 3) Bypass plenum are supplied with 15mm Clean fiber.*
- 4) Bypass plenum opening are toward the Inlet opening as standard*
- 5) Size 16 & 18 have rectangular inlet

* Customized construction is available. Please refer to KBE Engineer.






MODEL KVAD-200-BP-SA

WITH INTEGRAL SOUND ATTENUATOR

DIMENSIONAL DATA




STANDARD WITH INTEGRAL SOUND ATTENUATOR

| UNIT SIZE | D | W | H | L | W1 | H1 | L1 | B | C |
|-----------|-----|-----|-----|------|-----|-----|------|-----|-----|
| 6 | 150 | 250 | 250 | 1100 | 200 | 200 | 1285 | 200 | 200 |
| 8 | 200 | 250 | 250 | 1100 | 200 | 200 | 1285 | 200 | 200 |
| 10 | 250 | 300 | 300 | 1100 | 250 | 250 | 1285 | 250 | 250 |
| 12 | 300 | 350 | 350 | 1100 | 300 | 300 | 1285 | 300 | 300 |

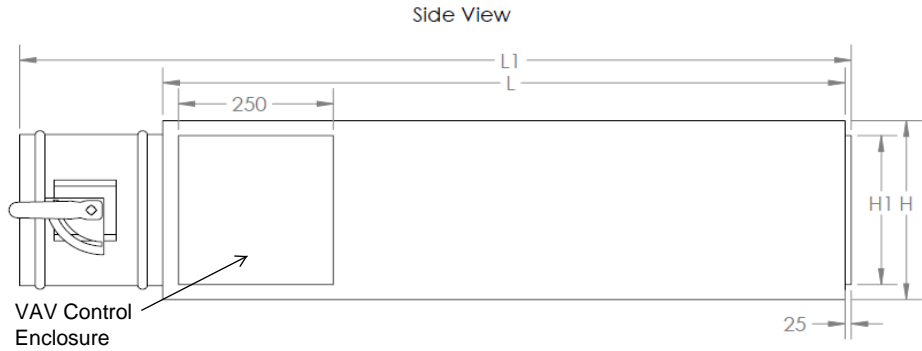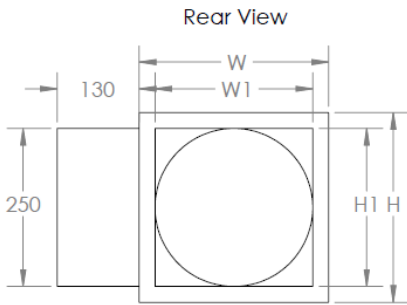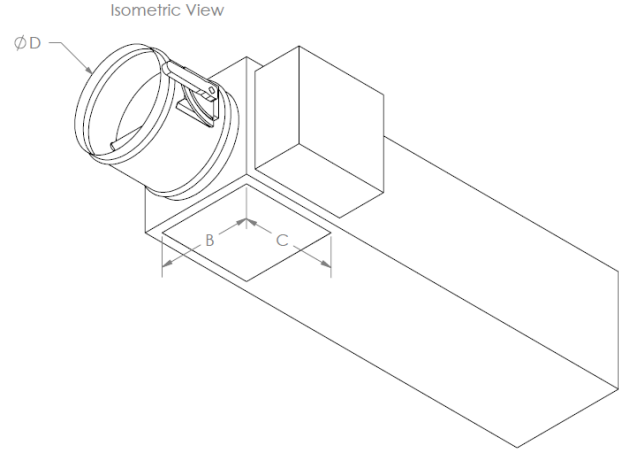

WITH INTEGRAL SOUND ATTENUATOR WITH BYPASS PLENUM (BY-PB)

| UNIT SIZE | D | W | H | L | W1 | H1 | L1 | H* | E |
|-----------|---------|-----|-----|------|-----|-----|------|-----|-----|
| 6 | 150 | 250 | 250 | 1100 | 200 | 200 | 1285 | 330 | 400 |
| 8 | 200 | 250 | 250 | 1100 | 200 | 200 | 1285 | 330 | 400 |
| 10 | 250 | 300 | 300 | 1100 | 250 | 250 | 1285 | 380 | 400 |
| 12 | 300 | 350 | 350 | 1100 | 300 | 300 | 1285 | 430 | 600 |
| 14 | 350 | 400 | 400 | 1100 | 350 | 350 | 1285 | 500 | 600 |
| 16 | 450x350 | 500 | 400 | 1200 | 450 | 350 | 1340 | 500 | 650 |
| 18 | 550x350 | 600 | 400 | 1200 | 550 | 350 | 1340 | 500 | 650 |

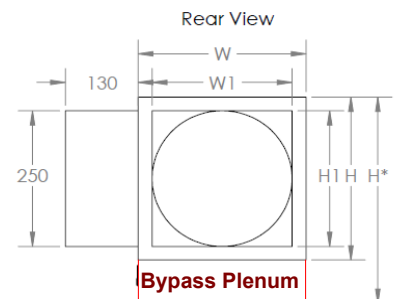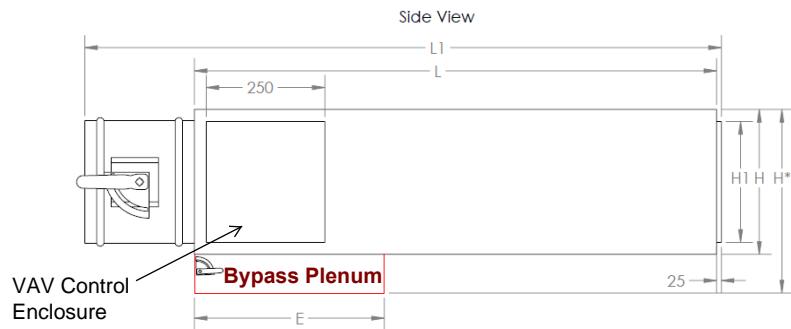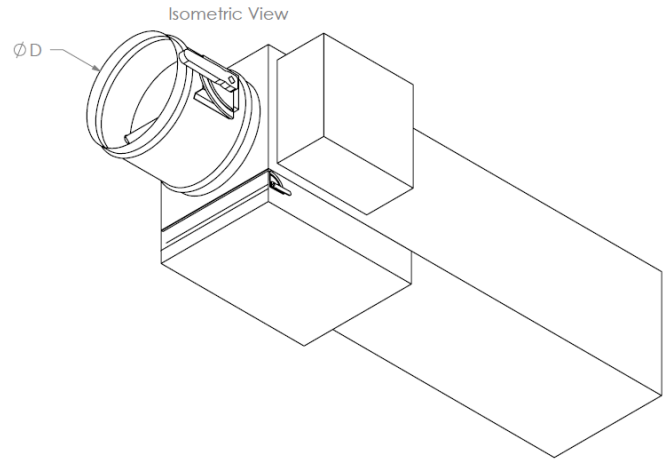

NOTES:

- 1) All sizes are in "mm"
- 2) Sizes 14, 16 & 18 are supplied with Bypass Plenum as standard *
- 3) Bypass plenum are supplied with 15mm Clean fiber.*
- 4) Bypass plenum opening are toward the Inlet opening as standard*
- 5) Size 16 & 18 have rectangular inlet

* Customized construction is available. Please refer to KBE Engineer.




MODEL KVAD-200-BP-EH

WITH ELECTRIC HEATER

DIMENSIONAL DATA




STANDARD WITH ELECTRIC HEATER

| UNIT SIZE | D | W | H | L | W1 | H1 | L1 | B | C |
|-----------|-----|-----|-----|------|-----|-----|------|-----|-----|
| 6 | 150 | 250 | 250 | 1100 | 200 | 200 | 1285 | 200 | 200 |
| 8 | 200 | 250 | 250 | 1100 | 200 | 200 | 1285 | 200 | 200 |
| 10 | 250 | 300 | 300 | 1100 | 250 | 250 | 1285 | 250 | 250 |
| 12 | 300 | 350 | 350 | 1100 | 300 | 300 | 1285 | 300 | 300 |

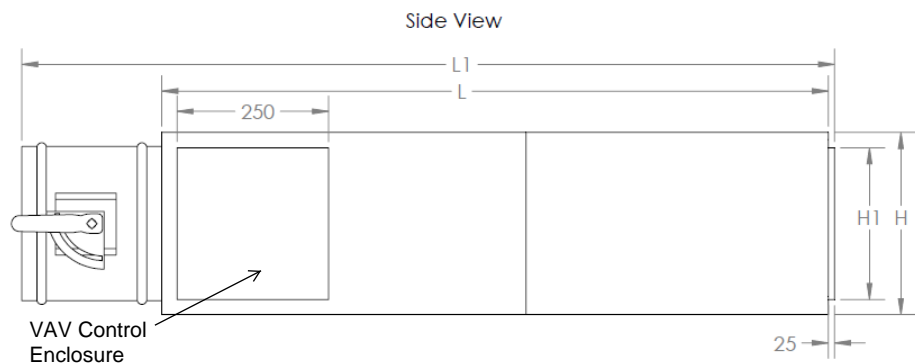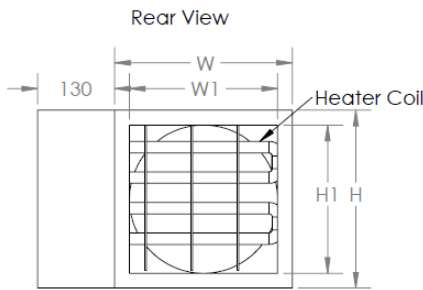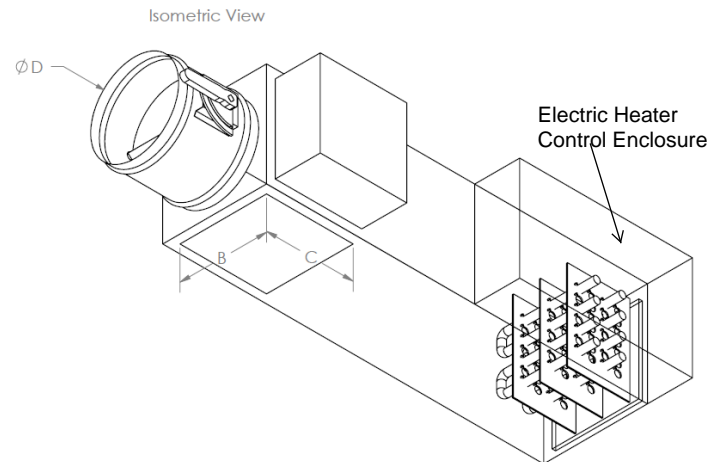

WITH ELECTRIC HEATER WITH BYPASS PLENUM (BY-PB)

| UNIT SIZE | D | W | H | L | W1 | H1 | L1 | H* | E |
|-----------|---------|-----|-----|------|-----|-----|------|-----|-----|
| 6 | 150 | 250 | 250 | 1100 | 200 | 200 | 1285 | 330 | 400 |
| 8 | 200 | 250 | 250 | 1100 | 200 | 200 | 1285 | 330 | 400 |
| 10 | 250 | 300 | 300 | 1100 | 250 | 250 | 1285 | 380 | 400 |
| 12 | 300 | 350 | 350 | 1100 | 300 | 300 | 1285 | 430 | 600 |
| 14 | 350 | 400 | 400 | 1100 | 350 | 350 | 1285 | 500 | 600 |
| 16 | 450x350 | 500 | 400 | 1200 | 450 | 350 | 1340 | 500 | 650 |
| 18 | 550x350 | 600 | 400 | 1200 | 550 | 350 | 1340 | 500 | 650 |

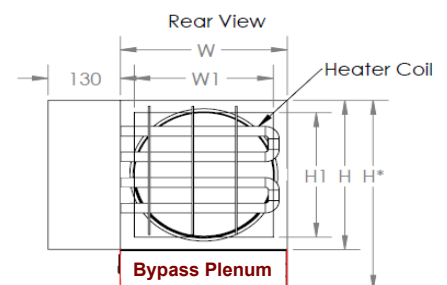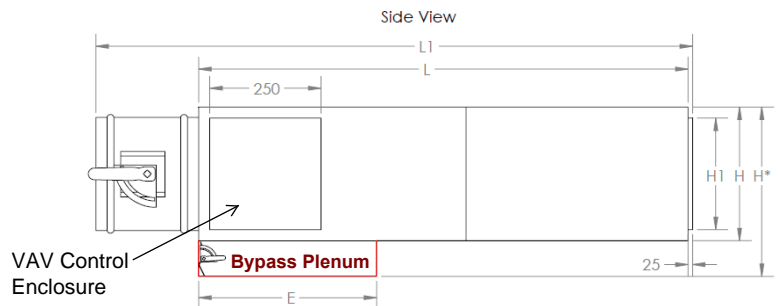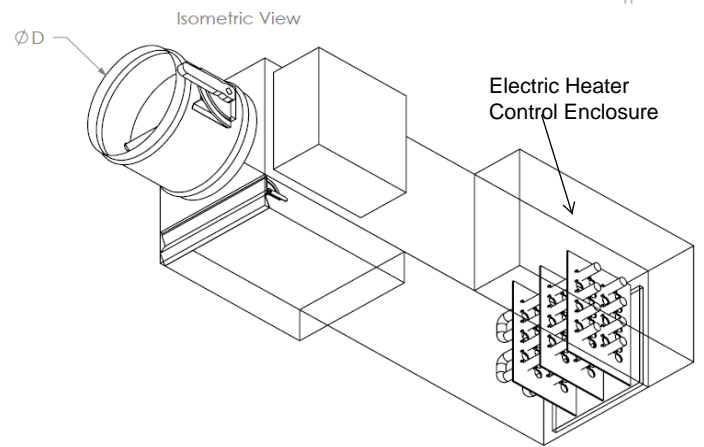

NOTES:

- 1) All sizes are in "mm"
- 2) Sizes 14, 16 & 18 are supplied with Bypass Plenum as standard *
- 3) Bypass plenum are supplied with 15mm Clean fiber.*
- 4) Bypass plenum opening are toward the Inlet opening as standard*
- 5) Size 16 & 18 have rectangular inlet

* Customized construction is available. Please refer to KBE Engineer.



MODEL KVAD-200-BP SELECTION DATA

SOUND DATA

| Unit Size | Airflow Cfm-(L/s) | Min Operating Pressure In. Wg. --(Pa) (BYPASS Closed) | Sound Power Levels (db) | | | | | | | | | | | | | |
|-----------|-------------------|--|--|----|----|----|----|----|-----|---------------------------------------|----|----|----|----|----|-----|
| | | | Discharge Octave Bands (Bypass Closed) | | | | | | | Radiated Octave Bands (Bypass Closed) | | | | | | |
| | | | 2 | 3 | 4 | 5 | 6 | 7 | NC | 2 | 3 | 4 | 5 | 6 | 7 | NC |
| 6 | 200 -(94) | 0.001--(0.1) | 49 | 37 | 28 | 26 | 19 | 17 | <15 | 43 | 31 | 28 | 24 | 18 | 18 | <15 |
| | 300 -(142) | 0.001--(0.2) | 55 | 43 | 34 | 29 | 22 | 18 | <15 | 43 | 34 | 31 | 26 | 19 | 18 | <15 |
| | 400 -(189) | 0.001--(0.3) | 55 | 47 | 40 | 28 | 22 | 19 | <15 | 45 | 37 | 38 | 34 | 24 | 18 | <15 |
| 8 | 300 -(142) | 0.001--(0.1) | 53 | 40 | 31 | 24 | 18 | 18 | <15 | 40 | 32 | 23 | 23 | 18 | 17 | <15 |
| | 500 -(236) | 0.001--(0.2) | 57 | 45 | 46 | 28 | 18 | 18 | <15 | 40 | 32 | 25 | 24 | 18 | 17 | <15 |
| | 700 -(330) | 0.001--(0.3) | 59 | 53 | 44 | 36 | 26 | 22 | <15 | 44 | 39 | 31 | 29 | 21 | 18 | <15 |
| 10 | 500-(236) | 0.001--(0.1) | 52 | 36 | 25 | 23 | 17 | 17 | <15 | 40 | 33 | 24 | 24 | 18 | 18 | <15 |
| | 700 -(330) | 0.001--(0.2) | 54 | 44 | 34 | 24 | 18 | 17 | <15 | 40 | 33 | 26 | 24 | 18 | 18 | <15 |
| | 1000- (472) | 0.001--(0.3) | 56 | 52 | 44 | 34 | 25 | 21 | <15 | 45 | 36 | 35 | 28 | 21 | 18 | <15 |
| 12 | 800- (378) | 0.001--(0.1) | 54 | 36 | 28 | 22 | 17 | 17 | <15 | 41 | 36 | 31 | 26 | 19 | 18 | <15 |
| | 1200 -(566) | 0.001--(0.2) | 56 | 43 | 38 | 26 | 19 | 17 | <15 | 44 | 38 | 35 | 29 | 23 | 18 | <15 |
| | 1600 -(755) | 0.001--(0.3) | 58 | 50 | 45 | 34 | 28 | 24 | <15 | 50 | 42 | 39 | 31 | 23 | 18 | <15 |
| 14 | 1500 -(708) | 0.001--(0.1) | 56 | 50 | 46 | 30 | 24 | 19 | <15 | 41 | 35 | 34 | 24 | 19 | 18 | <15 |
| | 2000 -(944) | 0.001--(0.2) | 60 | 56 | 53 | 38 | 34 | 30 | <15 | 47 | 42 | 41 | 27 | 24 | 20 | <15 |
| | 2500 -(1180) | 0.001--(0.3) | 64 | 62 | 58 | 45 | 41 | 38 | 18 | 53 | 48 | 47 | 34 | 28 | 22 | <15 |
| 16 | 1800 -(849) | 0.06 -- (15) | 51 | 48 | 48 | 40 | 36 | 29 | <15 | 46 | 39 | 38 | 33 | 29 | 19 | <15 |
| | 2700 -(1274) | 0.13 -- (32) | 62 | 56 | 54 | 51 | 47 | 42 | <15 | 55 | 49 | 45 | 44 | 37 | 30 | 19 |
| | 3600 -(1699) | 0.24 -- (60) | 67 | 63 | 60 | 56 | 54 | 51 | 21 | 62 | 57 | 52 | 49 | 44 | 39 | 27 |
| 18 | 2400 -(1133) | 0.05 -- (13) | 53 | 51 | 47 | 43 | 40 | 36 | <15 | 50 | 43 | 38 | 33 | 24 | 20 | <15 |
| | 3200 -(1510) | 0.09 -- (22) | 60 | 57 | 53 | 51 | 48 | 45 | <15 | 58 | 51 | 46 | 42 | 33 | 27 | 20 |
| | 4400 -(2076) | 0.17 -- (43) | 68 | 65 | 61 | 58 | 56 | 53 | 22 | 66 | 59 | 54 | 48 | 42 | 37 | 30 |

Notes:

- * "Min Operating Pressure (in. Wg.)" is the static pressure difference between the terminal inlet and discharge with the damper wide open
- * Discharge Sound power data is the noise emitted from the unit discharge into the downstream duct with inlet Damper fully open.
- * Radiated Sound Power is the noise transmitted through the casing walls with inlet Damper fully open and bypass damper fully closed.
- * Performance data obtained from test conducted in accordance with ARI Standard 880-2011 and ASHREA 130-2008 in Intertek Lab in N.Y- under report No. 102153542crt
- * NC Values calculated based ARI Standard 885-2008 Appendix E1 Typical sound Attenuation Values (shown at right)

| AHRI Standard DEDUCTIONS | | | | | | | |
|-------------------------------|----|----|----|----|----|----|--|
| Discharge Noise Criteria (NC) | | | | | | | |
| CFM | 2 | 3 | 4 | 5 | 6 | 7 | |
| <300 | 24 | 28 | 39 | 53 | 59 | 40 | |
| 300-700 | 27 | 29 | 40 | 51 | 53 | 39 | |
| >700 | 29 | 30 | 41 | 51 | 52 | 39 | |
| Radiated Noise Criteria (NC) | | | | | | | |
| Mineral Fiber Ceiling | 2 | 3 | 4 | 5 | 6 | 7 | |
| | 18 | 19 | 20 | 26 | 31 | 36 | |



BY-PASS VAV BOX MODEL KVAD-200-BP

ORDER INFORMATION

**MODEL CONST LINING PERFORATED FLANGE SIZE
(INCH)**



↑
KVAD-200
KVAD-200-SA
KVAD-200-EH

↑
--: 22GA (0.8mm) Galvanized Steel
20: 20GA (1.0mm) Galvanized Steel
SS: 0.8 mm Stainless Steel 304
10SS: 1.0 mm Stainless Steel 304
SS316: 0.8 mm Stainless Steel 316
10SS316: 1.0 mm Stainless Steel 316

↑
--: No Perforation
PRF: With Perforated sheet

↑
--: W/O Flange
F: With Flange
F-DM: With Duct Mate
Flange

↑
6
8
.
.
.
18

CL: Clean Liner 1.5 cm (STD)
CL-2.5: Clean Liner 2.5 cm
AF-1.5: Aluminum Foil Lining 1.5 cm
AF-2.5: Aluminum Foil Lining 2.5 cm

Product tested in Intertek Lab in accordance with ARI Standard 880.

AVAILABLE CONTROL

- STAND ALONE CONTROL WITH DIGITAL DISPLAY THERMOSTAT WITH CLASS II TRANSFORMER 24/220V
- BACNET CONTROL WITH DIGITAL DISPLAY THERMOSTAT WITH CLASS II TRANSFORMER 24/220V
- LON CONTROL WITH DIGITAL DISPLAY THERMOSTAT WITH CLASS II TRANSFORMER 24/220V